


UNI-LOC® SHORT THIN WALL COLLAR INSTALLATION

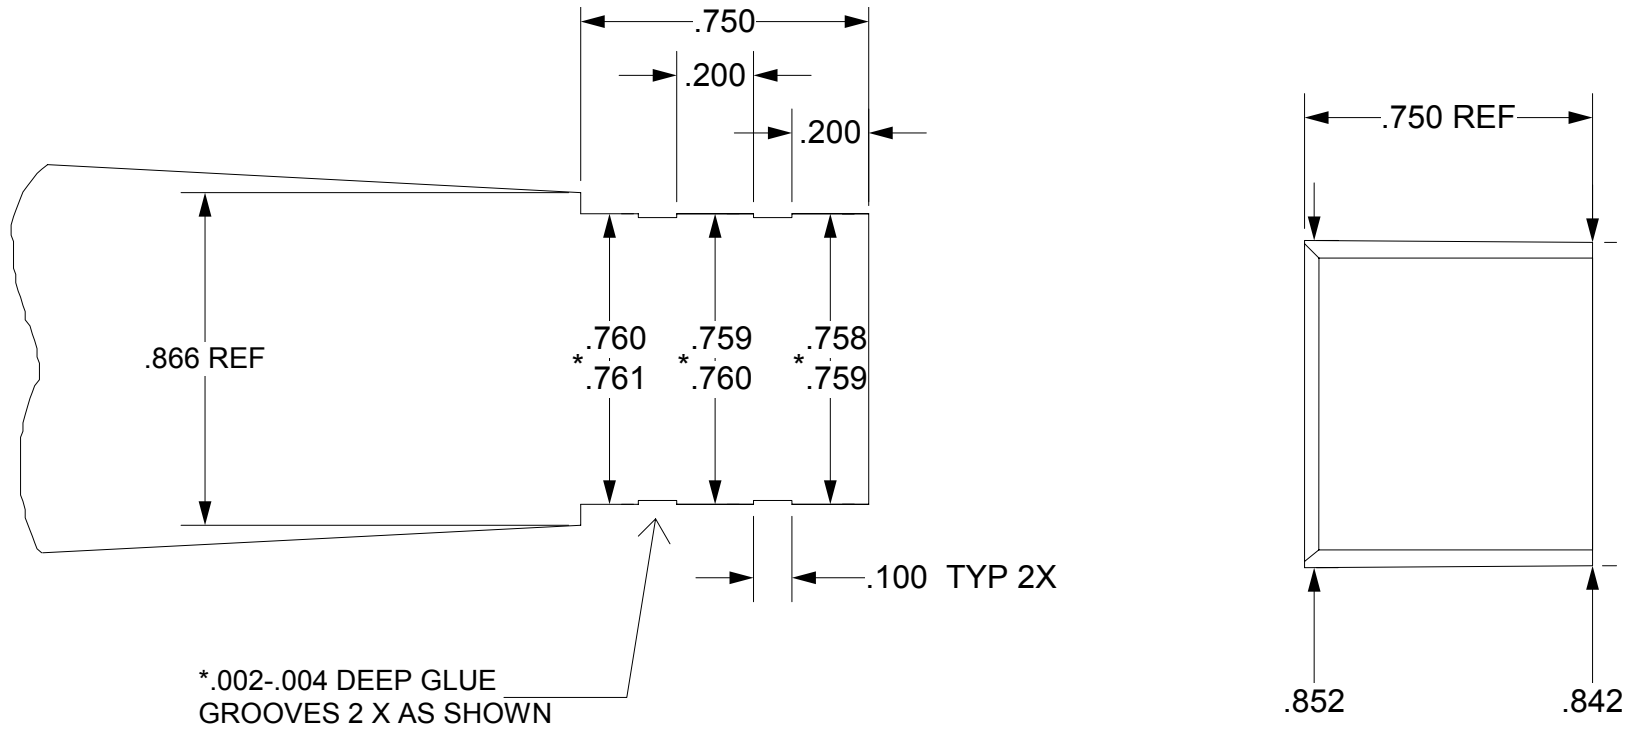

UNI-LOC® SHORT THIN WALL COLLAR INSTALLATION
 * MANUFACTURE'S RECOMMENDATION
 * DO NOT USE A PENETRATING EPOXY

UNI-LOC CORP. OF AMERICA 54 WAREHOUSE LANE ROWLEY, MA 01969 TEL 978-273-1315 FAX 978-948-2504 WWW.UNI-LOC.COM				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: ANGLES ± 1° 1 PLACE ± .02 2 PLACE ± .01 3 PLACE ± .005	DRAWN	PDC	CHECKED	ED
	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF UNI-LOC CORP. EXCEPT AS AUTHORIZED BY UNI-LOC CORP. IN A SEPARATE WRITING, THIS DOCUMENT AND ITS INFORMATION SHALL NOT BE COPIED, USED OR DISCLOSED TO OTHERS, AND SHALL BE RETURNED TO UNI-LOC CORP. UPON REQUEST.			
MACHINE FINISH 125/	TITLE PRETAPERED THIN WALL SHORT COLLAR INSTALATION			
MAT'L WOOD OR PHENOLIC	DRG NO. 012103			REV B